



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 892 544 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.01.1999 Bulletin 1999/03

(51) Int Cl.⁶: **H04N 1/00, H04N 1/32**

(21) Application number: **98305626.8**

(22) Date of filing: **14.07.1998**

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Sakaki, Eihiro**
Ohta-ku, Tokyo (JP)
• **Yamazaki, Hiroyuki**
Ohta-ku, Tokyo (JP)

(30) Priority: **15.07.1997 JP 189743/97**
15.07.1997 JP 189744/97

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)


(71) Applicant: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(54) **Image processing apparatus and method and storage medium**

(57) It is an object to provide an adding technique for enabling additional information to be certainly decoded from an image to which two or more kinds of additional information was added to an input image so that it is difficult to discriminate by the human eyes. To ac-

complish this object, for example, a plurality of kinds of additional information is periodically added to the input image at different periods so that it is difficult to discriminate by the human eyes. The image to which those additional information was added is outputted to an image forming unit.

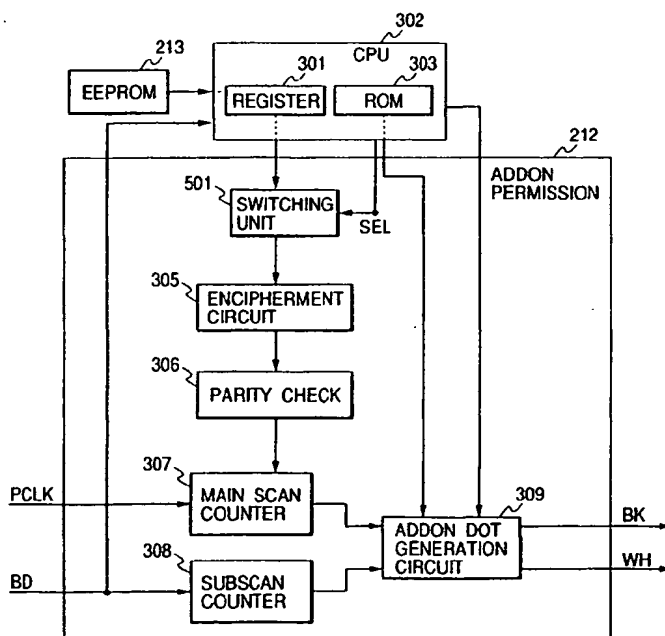FIG. 1



Description**BACKGROUND OF THE INVENTION**5 **Field of the Invention**

The invention relates to image processing apparatus and method having a function to add additional information to an input image and relates to a storage medium in which such a method has been stored.

10 **Related Background Art**

In recent years, the performance of an image processing apparatus such as color printer, color copying apparatus, or the like has been improved and an image of a high picture quality can be provided. Thus, an image can be being formed with a picture quality almost similar to that of a bill, securities, or the like.

15 However, the formation of such an image is prohibited and it is necessary to suppress such illegal behavior. As one of countermeasures for this purpose, there has been known a technique to bury a dot pattern showing the numbers (information such as manufacturing number, product number, user ID, and the like) which are peculiar to the image processing apparatus into each image to be formed. By performing such a process, even if an image is illegally formed, by analyzing the dot pattern buried in the formed image, various situations at a time when the image is formed can be
20 also known.

The dot pattern is periodically buried into the whole image every predetermined periods. Therefore, even if only a part of the image exists, since the information has been buried in this partial portion, the search of the various information as mentioned above can be executed.

To perfectly search the various information, an area of the partial portion in the image needs to be set to an area
25 corresponding to at least one period among the above periods.

A conventional adding method of the dot pattern (additional information) as mentioned above differs every manufacturer who manufactures each of the image processing apparatus. To decode the additional information such as a manufacturing number and the like on the basis of a certain formed image, it is necessary to sequentially use a decoding method corresponding to the adding method of each manufacturer.

30 However, hitherto, there is a problem such that the additional information (manufacturing number, product number, user ID, and the like) added to the image which is finally formed cannot be decoded at all due to a cause such that the image process of the input image has some periodic trouble, the original image contents are periodic, or the like.

Particularly, the problem as mentioned above is likely to occur in the case where an area of the formed image is small like a stamp or the like rather than the case where an area of the formed image is large like a bill or the like.

35 Hitherto, in the case where the number of manufacturers who manufacture the apparatuses is large, there is a problem such that a load to sequentially use the decoding methods as mentioned above is large. In particular, such a problem typically appears in case of performing the above decoding by a software process or the like.

SUMMARY OF THE INVENTION

40

The invention is made in consideration of the foregoing conventional technique and it is an object to provide an adding technique for enabling additional information to be certainly decoded from an image obtained by adding two or more kinds of additional information has been added to an input image so that it is difficult to discriminate by the human eyes.

45 For example, it is an object of the invention to enable information having a high significance to be decoded as much as possible in case of burying two or more kinds of additional information into an input image.

To accomplish the above objects, according to one preferred embodiment of the invention, there is provided an image processing apparatus comprising:

50 adding means for periodically adding first additional information to an input image by a first period so that it is difficult to discriminate by the human eyes and for periodically adding second additional information different from the first additional information by a second period different from the first period so that it is difficult to discriminate by the human eyes; and
output means for outputting the image to which predetermined additional information was added by the adding
55 means to an image forming unit.

According to another embodiment, there is provided an image processing apparatus comprising:

adding means for adding information consisting of first additional information and second additional information to an input image every unit area which is periodically assigned;
 switching means for switching a positional relation between an area showing the first additional information and an area showing the second additional information in the unit area; and
 5 output means for outputting the image to which predetermined additional information was added by the adding means to an image forming unit.

According to still another embodiment, there is provided an image processing apparatus comprising:

10 adding means for adding first additional information to an input image by a first method so that it is difficult to discriminate by the human eyes and for adding second additional information by a second method so that it is difficult to discriminate by the human eyes; and
 output means for outputting the image to which predetermined additional information was added by the adding means to an image forming unit,
 15 wherein the first additional information is information which can specify the second method.

According to further another embodiment, there is provided an image processing apparatus comprising:

20 adding means for adding first additional information including an error correction code having a first error correcting ability to an input image so that it is difficult to discriminate by the human eyes and for adding second additional information including an error correction code having a second error correcting ability different from the first error correcting ability so that it is difficult to discriminate by the human eyes; and
 output means for outputting the image to which predetermined additional information was added by the adding means to an image forming unit.

25 The above and other objects and features of the present invention will become apparent from the following detailed description and the appended claims with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

30 Fig. 1 is a detailed diagram of an additional dot generation unit 212;
 Fig. 2 is a diagram showing a state where AddOn dots were added;
 Fig. 3 is a diagram showing an example of an image processing apparatus;
 Fig. 4 is a diagram showing a procedure for image processes;
 35 Fig. 5 is a detailed diagram of the basic additional dot generation unit 212;
 Fig. 6 is a diagram showing a state in a register;
 Fig. 7 is a diagram showing an example of AddOn dots;
 Fig. 8 is a diagram showing a state where the AddOn dots were added;
 Fig. 9 is a diagram for explaining an adding method of an AddOn pattern;
 40 Fig. 10 is a diagram showing a state where the AddOn dots were added;
 Fig. 11 is a diagram showing an example of an image processing apparatus;
 Fig. 12 is a diagram showing a state where additional information was added to an input image;
 Fig. 13 is a diagram showing a state of a register to store a tracking code (additional information);
 Fig. 14 is a block diagram of an AddOn dot adding processing unit;
 45 Fig. 15 is a diagram for explaining an expressing method of information by AddOn dots;
 Fig. 16 is a diagram showing a code shown by each AddOn line;
 Fig. 17 is a diagram showing parity bits of a manufacturer ID;
 Fig. 18 is a diagram showing a procedure for decoding additional information from an image to which the additional information was added; and
 50 Fig. 19 is a conceptual diagram of additional information of a manufacturer ID, a product name, and a manufacturing number.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

55 The first embodiment of the present invention will now be described hereinbelow.

Fig. 3 is a diagram showing an image processing apparatus using a color electrophotographing technique which is used in the embodiment. In the diagram, reference numeral 214 denotes a printer controller (hereinafter, referred to as a controller), which will be explained hereinafter. The controller receives image data of R, G, and B each consisting

of eight bits per color inputted from a host computer serving as external equipment, executes well-known color image processes, and after that, outputs the processed image data to a printer engine at the post stage as image data of M (magenta), C (cyan), Y (yellow), and K (black) each consisting of 8 bits per color.

Reference numeral 215 denotes a printer engine (hereinafter, referred to as an engine), which will be explained hereinafter. The engine outputs the inputted color image data of MCYK as a laser beam L modulated on the basis of an image of each color.

A charging device 101 uniformly charges a photosensitive drum 100 to a predetermined polarity. For example, a first latent image is formed in magenta onto the photosensitive drum 100 by an exposure of the laser beam L.

In this case, a predetermined development bias voltage is subsequently applied to only a developing device Dm of magenta. A latent image of magenta is developed. A first toner image of magenta is formed on the photosensitive drum 100.

A transfer paper P is fed at a predetermined timing. Just before the front edge of the paper reaches a transfer start position, a transfer bias voltage (+1.8 kV) of a polarity (for example, plus polarity) opposite to the polarity of toner is applied to a transfer drum 102. The paper is electrostatically adsorbed onto the surface of the photosensitive drum 100. After that, the first toner image on the photosensitive drum 100 is transferred onto the transfer paper P and, at the same time, the transfer paper P is electrostatically adsorbed onto the surface of the transfer drum 102. Subsequently, the magenta toner remaining on the photosensitive drum 100 is removed by a cleaner 103, thereby preparing for the latent image formation and a developing step of the next color.

A second latent image of cyan is subsequently formed on the photosensitive drum 100 by the laser beam L. The second latent image on the photosensitive drum 100 is formed by a developing device Dc of cyan, so that a second toner image is formed. The second toner image of cyan is transferred onto the transfer paper P so as to be matched to the position of the first latent image of magenta which has already been transferred onto the transfer paper P. In the transfer of the toner image of the second color, a bias voltage of +2.1 kV is applied to the transfer drum 102 just before the transfer paper P reaches the transfer unit.

Similarly, third and fourth latent images of yellow and black are sequentially formed on the photosensitive drum 100 and are sequentially developed by developing devices Dy and Db, respectively. Third and fourth toner images of yellow and black are sequentially transferred so as to be matched to the position of the toner image which has already been transferred to the transfer paper P. Thus, the toner images of four colors are formed on the transfer paper P in an overlapped state.

Fig. 4 is a block diagram showing an image processing procedure. Color image data of RGB is transmitted in parallel from a host computer 201 serving as external equipment and is inputted to the controller 214.

A color conversion processing unit 202, a γ (gamma) correction unit 203, and a half tone processing unit 204 are arranged in the controller 214. Processes such as masking and UCR are executed to the inputted RGB signals by the color conversion processing unit 202 and a color correction and an undercolor removal are executed, so that they are converted into image data of magenta (M), cyan (C), yellow (Y), and black (K). Since the image processing apparatus prints every picture plane of each color of Y, M, C, and K, the image data is area sequentially outputted from the color conversion processing unit 202, namely, in accordance with the order of the data of one picture plane of M, the data of one picture plane of C, the data of one picture plane of Y, and the data of one picture plane of K.

Subsequently, the image data is corrected by the γ correction unit so that an output density curve becomes linear. A half tone process is executed by the half tone processing unit 204 by a method such as systematic dither method, error diffusing method, or the like.

After the above processes were executed in the controller 214, the image data of M, C, Y, and K is area sequentially inputted to the engine 215.

The engine 215 is constructed by an AddOn adding processing unit 205, a PWM (Pulse Width Modulation) processing unit 206, a laser drive unit 207, an additional dot generation unit 212, an EEPROM 213, and the like.

The AddOn adding processing unit 205 buries enciphered information (dot pattern) as necessary into the image data of M, C, Y, and K inputted from the controller 214 in accordance with the signal which is inputted from the additional dot generation unit 212 and outputs the resultant image data to the PWM processing unit 206. In the embodiment, an AddOn pattern is added to only the image data of yellow (Y) which is inputted and the resultant image data is outputted. This is because a feature such that the image of yellow (Y) is difficult to be discriminated by the human eyes rather than the images of the other colors (M, C, K) is used.

After that, the image data is pulse width modulated by the PWM processing unit 206 and is D/A converted. After that, the converted analog signal is inputted to the laser drive unit 207 and is printed.

A CPU 302 is provided in the engine 215 and executes a control of each block in the engine and transmission and reception of data to/from the respective blocks.

Fig. 5 is a block diagram of the basic additional dot generation unit 212 to bury additional information into an image. Fake tracking codes (additional information) stored in the EEPROM 213 are loaded into a register 301 in the CPU 302 when the image processing apparatus is activated.

Fig. 6 shows an internal construction of the register 301. Codes are stored in addresses F000 to F005 in the register. Total twelve bits consisting of eight bits of the address F000 and upper four bits of the address F001 shown in hatched portions in the diagram correspond to an area to store a code of a manufacturer ID (ID of the manufacturer who manufactured the image processing apparatus, printer controller 214, or printer engine 215). Among them, 8 bits indicate the code of the actual manufacturer ID and remaining 4 bits are parity bits for parity check.

Codes of the factory ID of the manufacturer who manufactured the image processing apparatus, the apparatus number, the model number, and the like are stored in the other areas (lower four bits of the address F001 and the addresses of F002 to F005). The parity bits for parity check are also similarly added and stored in those registers.

When the image processing apparatus starts the printing operation, those values are enciphered by an encipherment circuit 305 and a parity is checked by a parity check 306. If there is an error here, the printing operation is stopped.

A main scan counter 307 transmits an ON signal at a position where AddOn dots should be added in accordance with a clock signal PCLK in the main scan direction of the image data. A subscan counter 308 performs a counting operation in response to a clock signal BD in the subscan direction and transmits an ON signal in an AddOn line. An AddOn dot generation circuit 309 receives an AddOn dot shape parameter which is stored in a ROM 303 of the CPU. The circuit 309 generates AddOn dots only when all of an AddOn permission signal which is turned on only when the yellow data is transmitted, the main scan counter 307, and the subscan counter 308 are ON. In an FF (the highest density) area, K is set to ON and in a 00 (the lowest density) area, WH (white) is set to ON, and they are transmitted. In the AddOn adding processing unit 205 in Fig. 4, when K is inputted, the image data at the position of the corresponding image is forcedly modulated to the highest density. When WH is inputted, it is modulated to the lowest density.

Fig. 7 is an example (enlarged diagram) of the AddOn dots. A broken line in the diagram shows an AddOn line (in the embodiment, it is assumed that one AddOn line has a thickness of four pixels) of the n-th line in the image. Reference numeral 404 denotes an AddOn dot and 405 indicates an enlarged dot of the AddOn dot. The AddOn dot is formed by an FF area 401 and 00 areas 402 and 403 located on both sides of the FF area 401. As mentioned above, the AddOn dot 404 is added to the AddOn line for a multi-value image (plane of yellow). As will be explained hereinafter, a phase difference between the AddOn dots can be used as various additional information.

Fig. 8 shows a state of a formed image in the yellow plane derived by the addition of the basic additional information (AddOn dot) executed by the additional dot generation unit 212 in Fig. 5. Reference numeral 1201 corresponds to the AddOn dots 404 and 405.

An area 1202 shown by $a \times b$ denotes a size of image area which can express all of the additional information, namely, an image size of one period to add the additional information. All of the codes stored in the register in Fig. 6 can be expressed by the dots added in the area 1202.

A plurality of AddOn dots 1201 in the area 1202 are repetitively added to the whole image. In the present description, 16 lines 1203 called AddOn lines exist in the area of one period in the main scan direction. The AddOn dots 1201 are arranged one by one on each AddOn line.

By adding reference dots 1204 onto the zeroth and seventh AddOn lines, the start (head AddOn line) of one period and the direction of the AddOn line can be specified. The manufacturer ID and the other additional information (factory ID, apparatus number, model number, and the like) added by the additional dot generation unit 212 in Fig. 5 are always added at predetermined positions in the area 1202, respectively. Specifically speaking, four AddOn lines from the head correspond to the portion which always shows the manufacturer ID and the remaining AddOn lines correspond to the portion showing the other additional information.

How to show various codes (additional information) by a plurality of AddOn dots will now be described with reference to the drawings. Fig. 9 enlargedly shows the n-th and (n+1)th AddOn lines.

T denotes the repeating period of the AddOn pattern in the main scan direction. That is, AddOn dots 901 and 903 have similar roles and information is not shown by AddOn dots 901 and 902.

In the embodiment, it is assumed that information is expressed by a phase difference between the AddOn lines before and after the present line in the area 1202. By assigning phase differences like 0 to 7 in the diagram, information of three bits can be shown by each AddOn line. Since there are 16 AddOn lines in Fig. 8, information of 48 bits can be expressed and all of the codes stored in the register 301 can be added. In Fig. 9, t denotes a phase difference between the AddOn dots 901 and 903 and shows 3-bit information of "2", namely, "010" in this case.

The basic construction when adding additional information to the input image has been described above. A characteristic construction of the embodiment will now be described hereinbelow.

In the embodiment, a construction of the foregoing additional dot generation unit 212, namely, a method of adding the manufacturer ID and the other information differs. The adding method will now be described in detail hereinbelow. Since the basic construction of the image processing apparatus shown in Figs. 3 and 4 is similar to that mentioned above, its description is omitted.

Fig. 1 is a detailed diagram showing the additional dot generation unit 212, EEPROM 213, and CPU 302 in the embodiment. Component elements similar to those in Fig. 5 are designated by the same reference numerals and their descriptions are omitted.

The fake tracking codes (additional information) stored in the EEPROM 213 are loaded into the register 301 in the CPU 302 when the image processing apparatus is activated. Data which is loaded into the register 301 is data similar to that in Fig. 6.

Reference numerals 501 and 502 denote switching units for simultaneously performing the switching operations, which will be explained hereinafter, by the CPU 302 every predetermined AddOn line when the AddOn dots showing the manufacturer ID are formed and when the AddOn dots showing the other additional information are formed.

The CPU 302 has the switching unit 501 for counting the AddOn lines by counting the BD signal which is inputted and for switching so as to read out necessary codes every predetermined AddOn line on the basis of pattern information stored in the ROM. In the switching, a control signal SEL is generated from the CPU 302 for always counting the BD signal so that the addition of dots, which will be explained hereinafter, is executed.

Explanation will now be made hereinbelow with respect to a control such that all of the various additional information is not always added at fixed periods but important information (the manufacturer ID in the embodiment) in the plurality of additional information is added while changing the period.

First, when the image processing apparatus starts the printing operation, the control signal SEL to control so as to read out 12 bits (including the parity bits) showing the manufacturer ID in the register 301 is outputted from the CPU 302 to the switching unit.

Subsequently, the control signal SEL to control so as to read out the codes showing the other additional information (manufacturer ID, apparatus number, model number, and the like) as much as only predetermined AddOn lines is outputted from the CPU 302 to the switching unit.

For the above period of time, the CPU 302 always counts the AddOn lines. Therefore, for example, in case of sequentially adding the other additional information in accordance with the order of the manufacturer ID → apparatus number → model number, when reaching a predetermined number of AddOn lines at which the addition of the codes showing the manufacturer ID and the apparatus number is finished, the control signal SEL to control so as to read out the code showing the manufacturer ID is again outputted from the CPU 302 to the switching unit.

When the reading of the manufacturer ID is subsequently finished, the control signal SEL to control so as to read out the model number instead of the manufacturer ID and the apparatus number is outputted from the CPU 302 to the switching unit.

When the reading of the model number is finished, the control signal SEL to control so as to read out the code indicative of the manufacturer ID is again outputted from the CPU 302 to the switching unit.

By repeating the above processing steps, while the information of a relatively low significance is added one by one, two important information such as a manufacturer ID can be added.

In order to easily execute the foregoing control of AddOn lines, it is desirable that the AddOn lines corresponding to the codes showing the manufacturer ID, apparatus number, and model number are independent. However, even if such a construction is not used, it is possible to sufficiently execute. In this case, it is sufficient that the control signal SEL performs the read control on a unit basis of bits (3 bits in the embodiment) which can express one AddOn line instead of performing the read control every kind of additional information as mentioned above.

The code which was read out while performing the above control is enciphered by the encipherment circuit 305 in a manner similar to the encipherment circuit 305 in Fig. 5. A parity is checked by the parity check 306. If an error occurs here, the printing operation is stopped.

The subsequent process to add the AddOn dots is similar to that in Fig. 5.

Fig. 2 is a diagram showing a state when AddOn dots (additional information) is added by using the additional dot generation unit 212 in Fig. 1.

A meshed area 702 shown by $A \times B$ corresponds to the area 1202 in Fig. 8, namely, to an image area of a unit period which can show all of the information.

Fig. 2 differs from the case of Fig. 8 with respect to a point that the number of AddOn lines showing the manufacturer ID is doubled (8 lines). Therefore, the number of necessary AddOn lines is equal to 20.

Each dot 701 is the same as the AddOn dot in Fig. 8 and is shown in Fig. 7.

In the diagram, an area (for example, AddOn lines 1 to 4) shown by $A \times C$ and an area (for instance, AddOn lines 11 to 14) shown by $A \times D$ correspond to the AddOn lines indicative of the manufacturer ID.

In the embodiment, among a plurality of additional information which is added to the image, since the manufacturer ID is set to the information which needs the maximum decodability, it is controlled so that the manufacturer ID is added twice in a unit area (area 702).

Thus, even if there are causes of periodic elements such as in the case where a dot image similar to the dot 701 periodically exists in an image to which additional information should be added (in the case where the original image is an image such that a dot image always exists in the area of $A \times C$ at the same period as that in the area 702), in the case where there is always a trouble or the like of the image process in the area of $A \times C$ at the same period as that of the area 702, or the like, since the same information exists in the area of $A \times D$ in the area 702, the additional information (manufacturer ID in this case) can be certainly decoded.

Although the important information has been set to the manufacturer ID in the above embodiment, the invention is not limited to it. The user ID or the factory ID can be also used as important information.

In the above embodiment, each time the other information is added once, the important information is added twice.

However, the invention is not limited to such a method but the important information can be also added a plurality of number of times such as three or more times in accordance with the importance.

Each time the other information is added once, the important information is not added a plurality of number of times but the position of the AddOn line showing the important information can be also varied in the area of the unit period (702 in Fig. 2, 1202 in Fig. 8).

Fig. 10 is a diagram showing a state where the additional information was added by using the above method. An outline of the diagram is similar to Fig. 8. Fig. 10 differs from Fig. 8 with respect to a point that four AddOn lines to show the important information (manufacturer ID in this case) change on the area 1202. In the diagram, in an area 1202a at the first left upper position of the image, an area E_1 of the first four AddOn lines is an area showing the important information. On an area 1202b, an area E_2 of the last four AddOn lines changes to the area to indicate the important information. Subsequently, the position of the four AddOn lines to show the important information is changed like E_3, E_4, \dots

Thus, even if there is a cause of periodic elements such as in the case where a dot image similar to the dot 1201 periodically exists in an image to which the additional information should be added, in the case where a trouble or the like in the image process always exists in the area of E_1 at the same period as that in the area 702, or the like, the additional information can be certainly decoded.

In the above embodiment, as for the AddOn dots, the additional information is added by the dots 404 and 405 constructed by combining the FF area and 00 area as shown in Fig. 7. However, the invention is not limited to such a method. Dots can be also formed by performing a modulation of $+\alpha$ to the original image with respect to the area corresponding to the FF area and by executing a modulation of $-\alpha$ to the area corresponding to the 00 area.

According to this construction, since the density of the original image is substantially preserved, the deterioration in picture quality can be suppressed as much as possible.

According to the invention as described above, in the case such that the additional information is added to the input image a plurality of number of times, a situation such that the additional information to be added becomes difficult to be decoded due to causes of some periodic elements such that at least a part of the input image is periodical, a trouble or the like in the image process is periodical, or the like can be avoided. Particularly, in case of burying a plurality of kinds of additional information to the input image, the information having high significance can be decoded as much as possible.

As a second embodiment of the invention, an image processing apparatus using a color electrophotographing technique is shown. However, the invention is not limited to it but can be also applied to an image processing apparatus using a technique such as ink jet system, thermal transfer system, or the like. The invention is not limited to the apparatus invention but a method of performing the processes, which will be explained hereinlater, software to perform this method, and the like are also incorporated in the present invention.

In the embodiment, it is now assumed that the image data which is inputted is multi-value image data of M (magenta), C (cyan), Y (yellow), and K (black) each consisting of 8 bits per color and the multi-value image data is area sequentially inputted.

It is also assumed that the image processing apparatus (laser beam printer) of the embodiment has a resolution of 600 dpi and the dot pattern showing the additional information for fake tracking is added to only the plane of Y. By using this method, it is possible to construct such that the additional information is difficult to be discriminated by the human eyes as much as possible. Even a color image to which the additional information was added can be used in a manner similar to the original color image before the additional information is added. The invention is not limited to the case of adding the additional information for fake tracking. In other words, a case where the name of author who made the original image or the title or the like of the image is used as additional information is also incorporated in the invention.

Fig. 11 shows a construction of an image processing apparatus which is used in the following embodiment.

Reference numeral 1000 denotes an image processing unit. The image processing unit 1000 sequentially inputs multi-value image data of M, C, Y, and K from external equipment or another equipment in the apparatus, adds addition information, which will be explained hereinlater, to the multi-value image data, and after that, outputs the image data of each color to a laser light emitting unit 1001. The laser light emitting unit 1001 emits the laser beam L, which will be explained hereinlater, modulated in accordance with the inputted image data.

The photosensitive drum 100 is uniformly charged to a predetermined polarity by the charging device 101. For example, a first latent image of magenta is formed on the photosensitive drum 100 by the exposure by the laser beam L. In this case, a desired development bias voltage is applied to only the developing device Dm of magenta, the latent image of magenta is developed, and the first toner image of magenta is formed on the photosensitive drum 100.

On the other hand, the transfer paper P is fed at a predetermined timing. Just before the front edge of the transfer

paper reaches the transfer start position, a transfer bias voltage (+1.8 kV) of a polarity (for example, plus polarity) opposite to that of the toner is applied to the transfer drum 102. The first toner image on the photosensitive drum 100 is transferred onto the transfer paper P. The transfer paper P is electrostatically adsorbed onto the surface of the transfer drum 102. After that, the residual magenta toner on the photosensitive drum 100 is removed by the cleaner 103, thereby preparing for the latent image formation and the developing step of the next color.

Subsequently, in a manner similar to the case of magenta mentioned above, the second latent image of cyan is formed onto the photosensitive drum 100 by the laser beam L. The second latent image on the photosensitive drum 100 is developed by the developing device Dc of cyan. The second toner image of cyan is formed. The second toner image of cyan is transferred onto the transfer paper P while matching to the position of the first toner image of magenta which has already been transferred to the transfer paper P. In the transfer of the toner image of the second color, just before the transfer paper reaches the transfer unit, a bias voltage of +2.1 kV is applied to the transfer drum 102.

Similarly, the third and fourth latent images of yellow and black are sequentially formed on the photosensitive drum 100 and are sequentially developed by the developing devices Dy and Db, respectively. The third and fourth toner images of yellow and black are sequentially transferred while matching to the position of the toner image which has already been transferred to the transfer paper P. Thus, a full color image in which the toner images of four colors were overlapped is formed on the transfer paper P.

Additional information for fake tracking which is added by the image processing apparatus of the embodiment will now be described.

Fig. 12 shows a state where the additional information was added to the image shown by the inputted image data in the embodiment. In the embodiment as mentioned above, since the additional information is added to only the plane of Y, Fig. 12 shows the image shown by the plane of Y of the color image comprising planes of Y, M, C, and K.

Each of dots 1201 existing in Fig. 12 is a dot of a micro area constructed by a plurality of pixels. This dot is referred to as an AddOn dot hereinbelow.

In the diagram, a meshed area 1202 is a unit area showing additional information which is added to the color image (plane of yellow) in the embodiment. The unit area 1202 periodically exists in the original color image (plane of yellow). By using this method, with respect to the color image finally formed after the additional information was added, the additional information can be analyzed with reference to any one of the areas.

A plurality of lines 1203 called AddOn lines exist in the unit area 1202. In the embodiment, it is assumed that 16 lines exist in the main scan direction. It is also assumed that as for the foregoing AddOn dots, one AddOn dot is arranged on each AddOn line in the unit area 1202. As will be explained hereinafter, the additional information can show various information by the position (phase) of the AddOn dot on each AddOn line. As various information, the product name, manufacturing number, manufacturer name, and the like of the image processing apparatus can be allocated.

A reference dot 1204 to prevent that the arranging direction of the AddOn dot to show the additional information is erroneously discriminated is added in the unit area 1202. The position of the reference dot is always fixed. In the embodiment, the reference dot 1204 is added onto the 0th and 7th AddOn lines together with the AddOn dot. By using this method, the AddOn line indicative of the start of the unit area can be specified and the arranging direction of the AddOn lines 0 to 15 can be specified.

Fig. 14 is a block diagram of an AddOn dot adding processing unit included in the image processing unit 1000 in Fig. 11. The additional information (product name of the apparatus, manufacturing number, manufacturer name, and the like) stored in an EEPROM 1401 is automatically loaded into a register 1402 in the CPU when the power source of the image processing apparatus is turned on.

Fig. 13 shows an internal construction of the register 1402. In the register 1402, codes are stored in addresses F000 to F00A. Total 12 bits comprising 8 bits of the address F000 shown by a hatched region and upper 4 bits of the address F0001 shown by a hatched region in the diagram correspond to an area only for use of the manufacturer name (manufacturer ID) mentioned above. The peculiar ID number assigned every manufacturer who manufactured the image processing apparatus is stored in this area. The codes indicative of the product name of the image processing apparatus, manufacturing number, and the like which have uniquely been determined by each manufacturer are stored in the other areas (lower 4 bits of the address F0001, and F002 to F00A).

Besides the foregoing additional information, the fixed bit in which a fixed value is stored and the parity bits for parity check are also stored in the register 1402.

When the image processing apparatus receives a command to print the color image, the foregoing additional information (product name of the apparatus, manufacturing number, manufacturer name, and the like) is inputted to an encipherment circuit 1405 and is enciphered.

The enciphered additional information is inputted to a parity check circuit 1406 and the parity and the fixed bit are checked. When an error occurs here, it is regarded that the additional information has been remodeled, thereby performing a control to stop the printing operation.

A main scan counter 1407 executes the counting operation in response to the clock signal PCLK in the main scan

direction of the image data and generates an ON signal at a position where the AddOn dot should be added in accordance with a code which is loaded by the parity check 1406. A subscan counter 1408 executes the counting operation in accordance with the clock signal BD in the subscan direction and generates an ON signal in the AddOn line.

An AddOn dot generation circuit 1409 receives the AddOn dot-shaped parameter which is stored into an ROM 1403 in the CPU, forms the AddOn dot only when all of an AddOn permission signal which is turned on only when the yellow plane of the image data is transmitted, the main scan counter 1407, and the subscan counter 1408 are ON, turns on the AddOn signal, and sends.

When the AddOn signal is OFF, an AddOn adding circuit 1404 transmits as it is to the image data which is inputted. When the AddOn signal is ON, the AddOn adding circuit 1404 converts it into the AddOn dot and sends it. Thus, the additional information (AddOn dot) is formed as shown in Fig. 12.

A method of analyzing the additional information added to the image data in the embodiment, namely, a method of showing the additional information by the AddOn dot will now be described.

Fig. 15 enlargedly shows the n-th and (n+1)th AddOn lines in the unit area 1202 in Fig. 12. Explanation will now be made with respect to the (n+1)th AddOn line. A phase difference using the AddOn dot on the n-th AddOn line as a reference is assigned to 0 to 7 (3 bits) as shown in the diagram, thereby allowing the AddOn dot to be added to the position corresponding to the 3-bit information to be added in the (n+1)th AddOn line. Therefore, information of 3 bits can be expressed by one AddOn line (AddOn dot). Thus, since there are 16 AddOn lines in the embodiment, additional information of total 48 bits can be added.

However, the invention is not limited to this method but the additional information can be also added by another method. For example, by adding a plurality of AddOn dots onto each AddOn line, more additional information can be also added.

As for the analysis of the phase difference, for example, the color image to which the additional information was added is read by a scanner, only the image of the plane of Y (yellow) is extracted and transmitted to a host computer, and an interval between the AddOn dots is measured on a monitor of the host computer, so that the phase difference can be measured. On the basis of the measured phase difference, the code of each AddOn line is searched and the searched codes are arranged as shown in Fig. 16 and are binarized. After that, the binary codes are assigned as address information of a00 to a30 and b00 to b112.

a00 to a32 indicate the manufacturer ID (manufacturer name) and a22, a30, a31, and a32 are parity bits.

First, when the manufacturer ID is analyzed, a00 to a32 are arranged as shown in Fig. 17 and it is confirmed that a22, a30, a31, and a32 become even parities in the arrow direction in the diagram. If an error is detected by the parity check, it is regarded that there is a reading mistake (analysis mistake) of the manufacturer ID and the operation is re-executed from the measurement.

If no error is detected by the parity check, a00 to a21 are arranged as follows, thereby obtaining the manufacturer ID.

$$\begin{aligned} \text{Manufacturer ID} = & (a_{21}, a_{20}, a_{12}, a_{11}, \\ & a_{10}, a_{02}, a_{01}, a_{00}) \end{aligned}$$

In the example of Fig. 16, the manufacturer ID is as follows.

$$\begin{aligned} \text{Manufacturer ID} = & (a_{21}, a_{20}, a_{12}, a_{11}, \\ & a_{10}, a_{02}, a_{01}, a_{00}) \end{aligned}$$

$$\begin{aligned} &= 0, 0, 1, 0, 0, 0, 1, 0(B) \\ &= 34(D) \end{aligned}$$

The manufacturer who manufactured the image processing apparatus which was used for the formation of the color image is analyzed by the obtained manufacturer ID.

After the manufacturer ID was analyzed, the additional information such as product name, manufacturing number, and the like can be analyzed by the method according to each manufacturer. This is because there is a possibility such that the adding method of the additional information such as product name, manufacturing number, and the like differs

every manufacturer. Therefore, the parity bits are independently added to the manufacturer ID and the product name and manufacturing number, respectively.

Subsequently, with respect to b00 to b112 (including the parity bits) showing the additional information such as product name, manufacturing number, and the like, they are analyzed (parity check) independently of the manufacturer ID.

As for the additional information of b00 to b112, after the decoding of the additional information of b00 to b112 and the parity check were performed by using the method suitable for each manufacturer, the model number, apparatus number, and the like are obtained.

As mentioned above, by independently adding the parity bits to the manufacturer ID (manufacturer name) and the product name and manufacturing number (model number, apparatus number, and the like can be also used), even in case of adding the additional information of the manufacturer ID and the additional information such as product name, manufacturing number, and the like to the image by different methods, whether the various analyzed additional information is accurate or not can be certainly discriminated.

Fig. 19 shows a conceptual diagram of the additional information such as manufacturer ID, product name, and manufacturing number added in the above embodiment.

In Fig. 19, reference numeral 1202 corresponds to the unit area 1202 in Fig. 12. The manufacturer ID is added (expressed) by using the AddOn lines (AddOn lines 0 to 3) of an upper area 1901 of the unit area 1202. The product name and the manufacturing number are added (expressed) by using the AddOn lines (AddOn lines 4 to 15) in a lower area 1902 of the unit area 1202.

A procedure to decode the additional information will now be explained with reference to Fig. 18.

When the decoding is started, the color image is first read by a scanner. Since the additional information of the embodiment has been added to the yellow plane, only the yellow plane is read (step S1). Subsequently, the reference dot is detected, the head of the AddOn line and the direction of the AddOn line are recognized, and phase differences among the AddOn lines 0 to 3 (AddOn lines 15 and 0; 0 and 1; 1 and 2; and 2 and 3) are measured (step S2).

The codes of the AddOn lines 0 to 3 are obtained on the basis of the measured phase differences (step S3) and are binarized and are assigned to a00 to a32 (step S4). The parity check of Fig. 17 mentioned above is subsequently executed (step S5). If there is an error, the operation is re-executed from the measurement of the phase differences (step S2). If there is no error, the manufacturer ID is obtained (step S6).

Phase differences among the AddOn lines 4 to 15 are subsequently measured (step S7). On the basis of the measured phase differences, the codes of the AddOn lines 4 to 15 are obtained (step S8) and are binarized and are assigned to b00 to b112 (step S9).

A check is made to see if the manufacturer ID obtained in step S6 indicates company A (step S10). If it is the company A, a module for company A is activated (step S11). The module for company A rearranges b00 to b112 in accordance with the rules of company A and the parity check and the like are executed. After that, the product name, manufacturing number, and the like are obtained.

When the manufacturer ID does not indicate company A in step S10, a check is made to see if it indicates company B (step S12). If it indicates company B, a module for company B is activated (step S13). In a manner similar to step S11, the module for company B rearranges b00 to b112 in accordance with the rules of company B and the parity check and the like are executed. After that, the product name, manufacturing number, and the like are obtained.

Similarly, when the manufacturer ID does not indicate company B in step S12, the manufacturer IDs are sequentially checked only a number of times as many as the number of registered manufacturers such that company C, company D,

In the embodiment, although the number of AddOn lines to store the information of each manufacturer has been fixed to 12 AddOn lines 4 to 15, the number of AddOn lines can be also varied every manufacturer.

In the embodiment, as for the parity bits, parity bits such that an error detection can be merely performed are added to the manufacturer ID corresponding to the area 1901 in Fig. 19 and the product name and manufacturing number corresponding to the area 1902 in Fig. 19, respectively. However, the invention is not limited to this method. An error correction code such that an error of the additional information can be corrected can be also provided for each of the additional information corresponding to the areas 1901 and 1902.

Thus, even if there is an error in the analysis of the additional information, the operation to again read the phase differences can be omitted.

Further, in the case where it is considered that significance of the additional information (manufacturer ID) in the area 1901 is higher than that of the additional information (product name, manufacturing number, and the like) corresponding to the area 1902 such as a case where there is a possibility such that unless the additional information of the area 1901 can be analyzed, the area 1902 cannot be analyzed or the like, it is also possible to give an error correction code of a high error correcting ability to the additional information of the area 1901 and to give an error correction code of a lower error correcting ability than that in the area 1901 to the area 1902.

By using this method, the important portion of the additional information can be certainly analyzed. Specifically

speaking, since the manufacturer ID can be certainly analyzed, a method for subsequently analyzing the product name, manufacturing number, and the like can be determined.

Although the embodiment has been described above on the assumption that the method of adding the manufacturer ID into the area 1901 and the method of adding the product name, manufacturing number, and the like into the area 1902 are the same method, the invention is not limited to this construction but also includes a case where the adding methods of the additional information to the areas 1901 and 1902 are different.

That is, in the embodiment, since the manufacturer ID which can specify the adding method of the area 1902 is added to the area 1901 different from the area 1902, there is an effect such that even if the adding methods of the additional information of the areas 1901 and 1902 are different, by sequentially analyzing in accordance with the order of the areas 1901 and 1902 as mentioned above, all of the additional information can be sufficiently decoded.

In the above embodiment, although the additional information has been added by the AddOn dot in which the original image is merely modulated to the highest density, the invention is not limited to such a construction. For example, even if one AddOn dot is constructed by combining an area to add $+\alpha$ to the density of the original image and an area to subtract α from the density of the original image, the additional information can be sufficiently analyzed. In this case, since the density of the original image is preserved, the picture quality that is further higher than that in the foregoing embodiment can be preferably held. One AddOn dot can be also constructed by combining an area to modulate the density of the original image to the highest density and an area to modulate it to the lowest density. By using this method, the AddOn dot can be easily decoded irrespective of the density of the original image.

According to the invention as described above, in the case where predetermined additional information is added to the input image by one of a plurality of methods which are generally considered so that it is difficult to discriminate by the human eyes, another information which can specify the method of adding the predetermined additional information is added so that it is difficult to discriminate by the human eyes. Therefore, the additional information can be efficiently decoded from the image to which the predetermined additional information was added.

The first additional information including the error correction code having the first error correcting ability is added to the input image so that it is difficult to discriminate by the human eyes and the second additional information including the error correction code having the second error correcting ability different from the first error correcting ability is added so that it is difficult to discriminate by the human eyes. Therefore, when the importance of a plurality of additional information which is added to the image so that it is difficult to discriminate by the human eyes is different, the additional information having the high importance can be certainly decoded.

The invention is not limited to each of the above embodiments but can be applied as a part of a system constructed by a plurality of equipment (for example, host computer, interface equipment, reader, printer, and the like) or can be also applied to a part of an apparatus comprising one equipment (for instance, copying apparatus or facsimile apparatus).

The invention is not limited to only the apparatus and method for realizing the above embodiments. The invention also incorporates a case where program codes of software to realize the embodiment are supplied to a computer (CPU, MPU) in the system or apparatus and the computer of the system or apparatus makes the various devices operative in accordance with the program codes, thereby realizing the embodiment.

In this case, the program codes themselves of the software realize the function of the embodiment. The program codes themselves and means for supplying the program codes to the computer, specifically speaking, a storage medium in which the program codes have been stored are also incorporated in the scope of the invention.

As a storage medium to store the program codes as mentioned above, for example, it is possible to use a floppy disk, a hard disk, an optical disk, a magnetooptic disk, a CD-ROM, a magnetic tape, a nonvolatile memory card, an ROM, or the like.

Not only in the case where the computer controls various devices in accordance with only the supplied program codes, thereby realizing the function of the embodiment but also in the case where the program codes cooperate together with the OS (Operating System) which operates on the computer or another application software or the like, the above program codes are also incorporated in the scope of the invention.

Further, the invention also incorporates a case where the supplied program codes are stored into a memory provided for a function expansion board of the computer or a function expanding unit connected to the computer and, after that, a CPU or the like provided for the function expansion board or function expanding unit executes a part or all of the actual processes on the basis of an instruction of the program codes and the embodiment is realized by the processes.

The present invention is not limited to the foregoing embodiments but many modifications and variations are possible within the spirit and scope of the appended claims of the invention.

Claims

1. An image processing apparatus comprising:

5 adding means for periodically adding first additional information to an input image by a first period so that it is difficult to discriminate by the human eyes and for periodically adding second additional information different from said first additional information by a second period different from said first period so that it is difficult to discriminate by the human eyes; and
10 output means for outputting the image to which predetermined additional information was added by said adding means to an image forming unit.

2. An apparatus according to claim 1, wherein said first period is shorter than said second period.

3. An image processing apparatus comprising:

15 adding means for adding information consisting of first additional information and second additional information to an input image every unit area which is periodically assigned;
switching means for switching a positional relation between an area showing said first additional information and an area showing said second additional information in said unit area; and
20 output means for outputting the image to which predetermined additional information was added by said adding means to an image forming unit.

4. An apparatus according to any of claims 1 to 3, wherein said first additional information is information to specify said image processing apparatus.

5. An apparatus according to any of claims 1 to 3, wherein said second additional information is information to specify said image processing apparatus.

6. An apparatus according to claim 4, wherein said first additional information is an ID of a manufacturer who manufactured said image processing apparatus.

7. An apparatus according to claim 5, wherein said second additional information is an apparatus number or a model number of said image processing apparatus.

8. An apparatus according to any of claims 1 to 3, further having said image forming unit.

9. An apparatus according to any of claims 1 to 3, wherein said input image is a color image constructed by a plurality of colors and said adding means adds said first or second additional information to a partial color instead of all of said plurality of colors.

10. An apparatus according to any of claims 1 to 3, wherein said adding means adds said first or second additional information as a plurality of dots.

11. An apparatus according to claim 10, wherein said first or second additional information is expressed by phase differences among said plurality of dots.

12. An apparatus according to claim 10, wherein each of said dots is constructed by combining an area to modulate an image to the highest density and an area to modulate the image to the lowest density.

13. An apparatus according to claim 10, wherein each of said dots is constructed by combining an area to modulate an image by only $+\alpha$ and an area to modulate the image by only $-\alpha$.

14. An image processing apparatus comprising:

55 adding means for adding first additional information to an input image by a first method so that it is difficult to discriminate by the human eyes and for adding second additional information by a second method so that it is difficult to discriminate by the human eyes; and
output means for outputting the image to which predetermined additional information was added by said adding

means to an image forming unit,
wherein said first additional information is information which can specify said second method.

15. An image processing apparatus comprising:

adding means for adding first additional information including an error correction code having a first error correcting ability to an input image so that it is difficult to discriminate by the human eyes and for adding second additional information including an error correction code having a second error correcting ability different from said first error correcting ability so that it is difficult to discriminate by the human eyes; and
output means for outputting the image to which predetermined additional information was added by said adding means to an image forming unit.

16. An apparatus according to either of claims 14 or 15, wherein said first additional information is information which can specify an adding method of said second additional information by said adding means.

17. An apparatus according to either of claims 14 or 15, wherein said first error correcting ability is higher than said second error correcting ability.

18. An apparatus according to either of claims 14 or 15, wherein a method of adding said first additional information and a method of adding said second additional information are different.

19. An apparatus according to either of claims 14 or 15, wherein a method of adding said first additional information and a method of adding said second additional information are the same.

20. An apparatus according to either of claims 14 or 15, wherein said input image is a color image constructed by planes of a plurality of colors, and said adding means adds said first and second additional information to only a partial plane among said planes of said plurality of colors.

21. An apparatus according to either of claims 14 or 15, wherein said first additional information is a manufacturer ID of said image processing apparatus.

22. An apparatus according to either of claims 14 or 15, wherein said second additional information is a model number or a product name of said image processing apparatus.

23. An apparatus according to either of claims 14 or 15, wherein said second additional information is an apparatus number or a manufacturing number of said image processing apparatus.

24. An apparatus according to either of claims 14 or 15, further comprising said image forming unit.

25. An apparatus according to either of claims 14 or 15, wherein said first additional information is a pattern constructed by a plurality of dots.

26. An apparatus according to either of claims 14 or 15, wherein said second additional information is a pattern constructed by a plurality of dots.

27. An apparatus according to either of claims 14 or 15, wherein said additional information is periodically added to said input image.

28. An apparatus according to either of claims 14 or 15, wherein said first additional information is added to a first area of said input image and said second additional information is added to a second area different from said first area.

29. An image processing method comprising:

an adding step of periodically adding first additional information to an input image by a first period so that it is difficult to discriminate by the human eyes and periodically adding second additional information different from said first additional information by a second period different from said first period so that it is difficult to discriminate by the human eyes; and
an outputting step of outputting the image to which predetermined additional information was added by said

adding step to an image forming unit.

30. An image processing method comprising:

5 an adding step of adding information consisting of first additional information and second additional information to an input image every unit area which is periodically assigned;
 a switching step of switching a positional relation between an area showing said first additional information and an area showing said second additional information in said unit area; and
 10 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit.

31. An image processing method comprising:

15 an adding step of adding first additional information to an input image by a first method so that it is difficult to discriminate by the human eyes and adding second additional information by a second method so that it is difficult to discriminate by the human eyes; and
 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit,
 20 wherein said first additional information is information which can specify said second method.

32. An image processing method comprising:

an adding step of adding first additional information including an error correction code having a first error correcting ability to an input image so that it is difficult to discriminate by the human eyes and adding second
 25 additional information including an error correction code having a second error correcting ability different from said first error correcting ability so that it is difficult to discriminate by the human eyes; and
 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit.

30 **33. A storage medium for storing an image processing program in a state where said program can be read out from a computer, said program comprising:**

an adding step of periodically adding first additional information to an input image by a first period so that it is difficult to discriminate by the human eyes and periodically adding second additional information different from
 35 said first additional information by a second period different from said first period so that it is difficult to discriminate by the human eyes; and
 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit.

40 **34. A storage medium for storing an image processing program in a state where said program can be read out from a computer, said program comprising:**

an adding step of adding information consisting of first additional information and second additional information to an input image every unit area which is periodically assigned;
 45 a switching step of switching a positional relation between an area showing said first additional information and an area showing said second additional information in said unit area; and
 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit.

50 **35. A storage medium for storing an image processing program in a state where said program can be read out from a computer, said program comprising:**

an adding step of adding first additional information to an input image by a first method so that it is difficult to discriminate by the human eyes and adding second additional information by a second method so that it is
 55 difficult to discriminate by the human eyes; and
 an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit;
 and in which said first additional information is information which can specify said second method.

36. A storage medium for storing an image processing program in a state where said program can be read out from a computer, said program comprising:

an adding step of adding first additional information including an error correction code having a first error correcting ability to an input image so that it is difficult to discriminate by the human eyes and adding second additional information including an error correction code having a second error correcting ability different from said first error correcting ability so that it is difficult to discriminate by the human eyes; and
an outputting step of outputting the image to which predetermined additional information was added by said adding step to an image forming unit.

FIG. 1

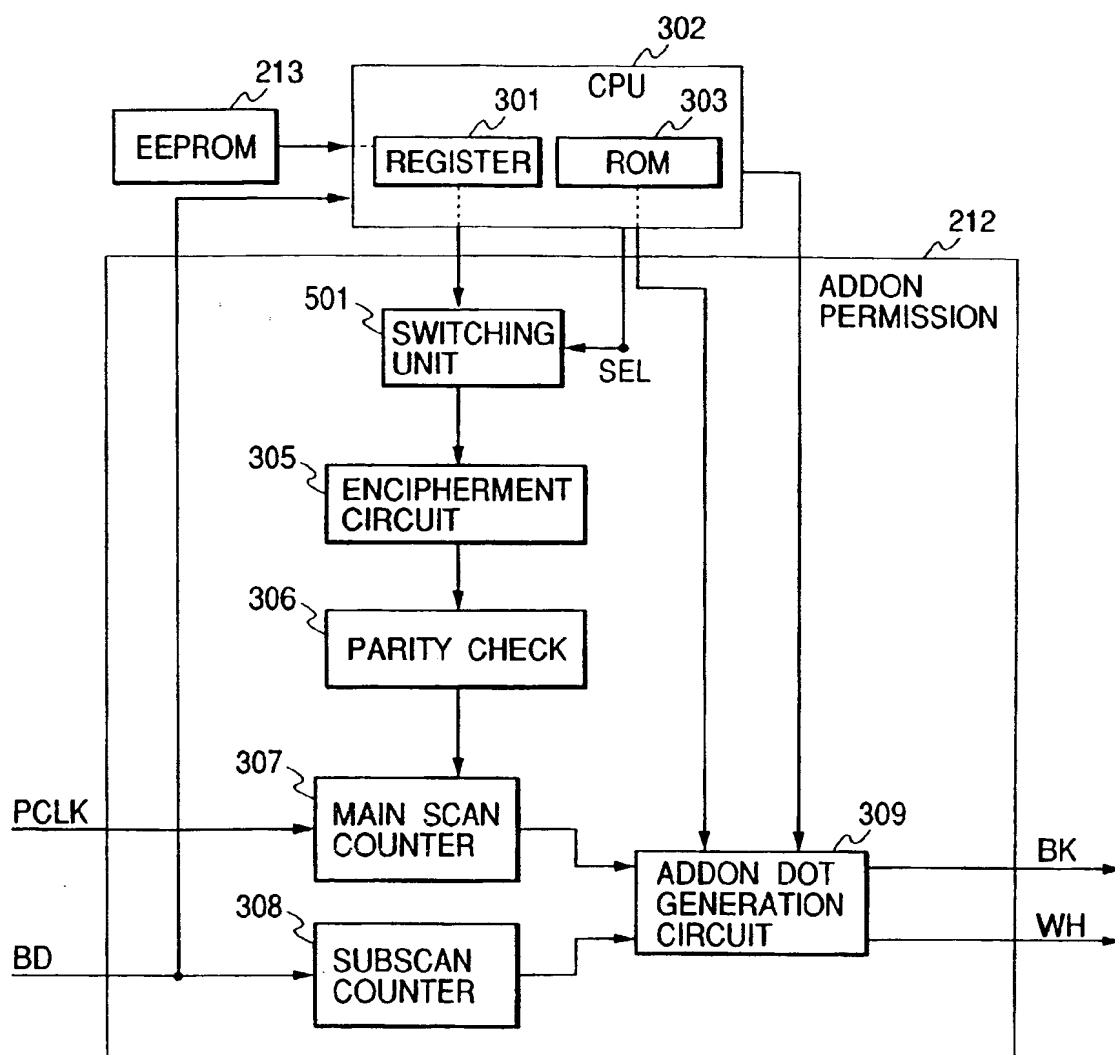


FIG. 3

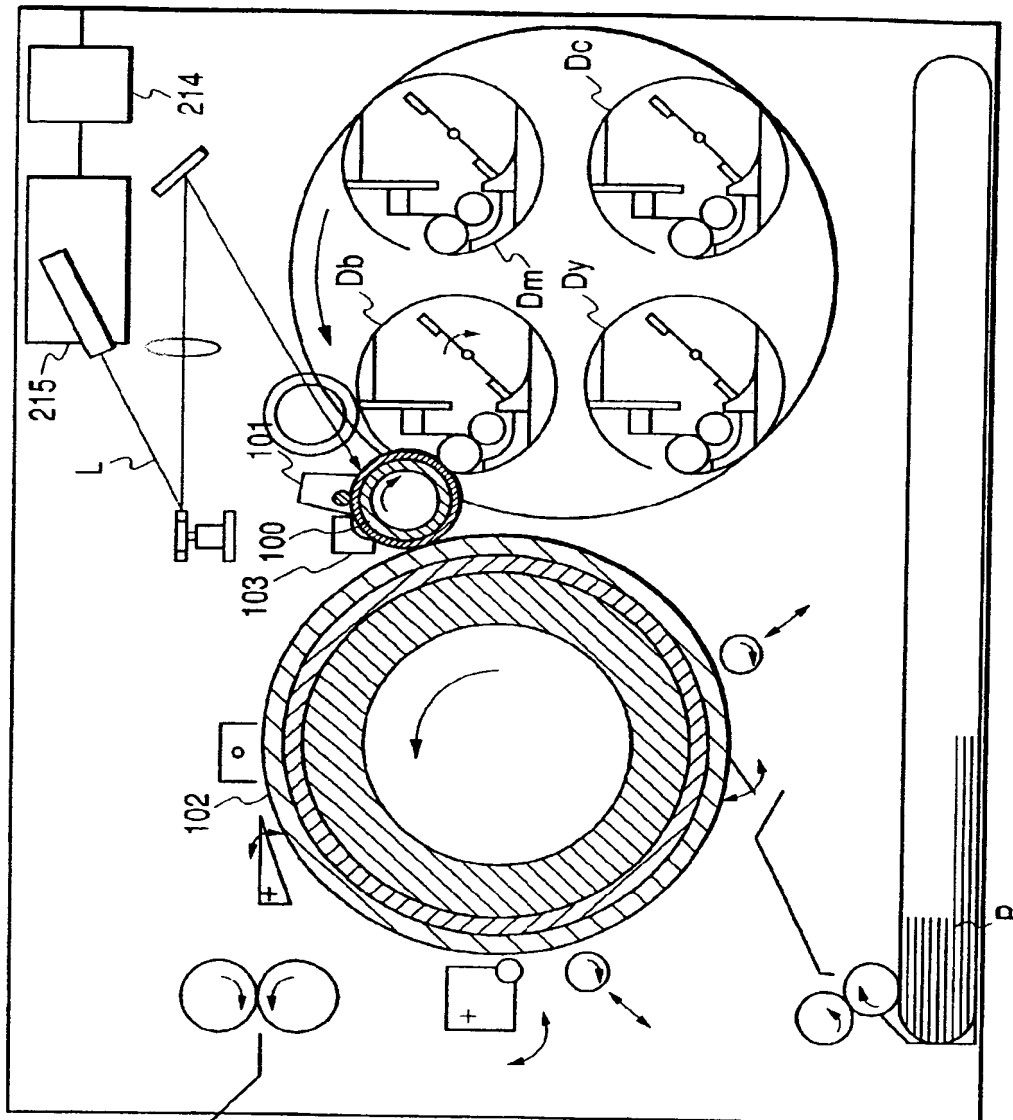


FIG. 4

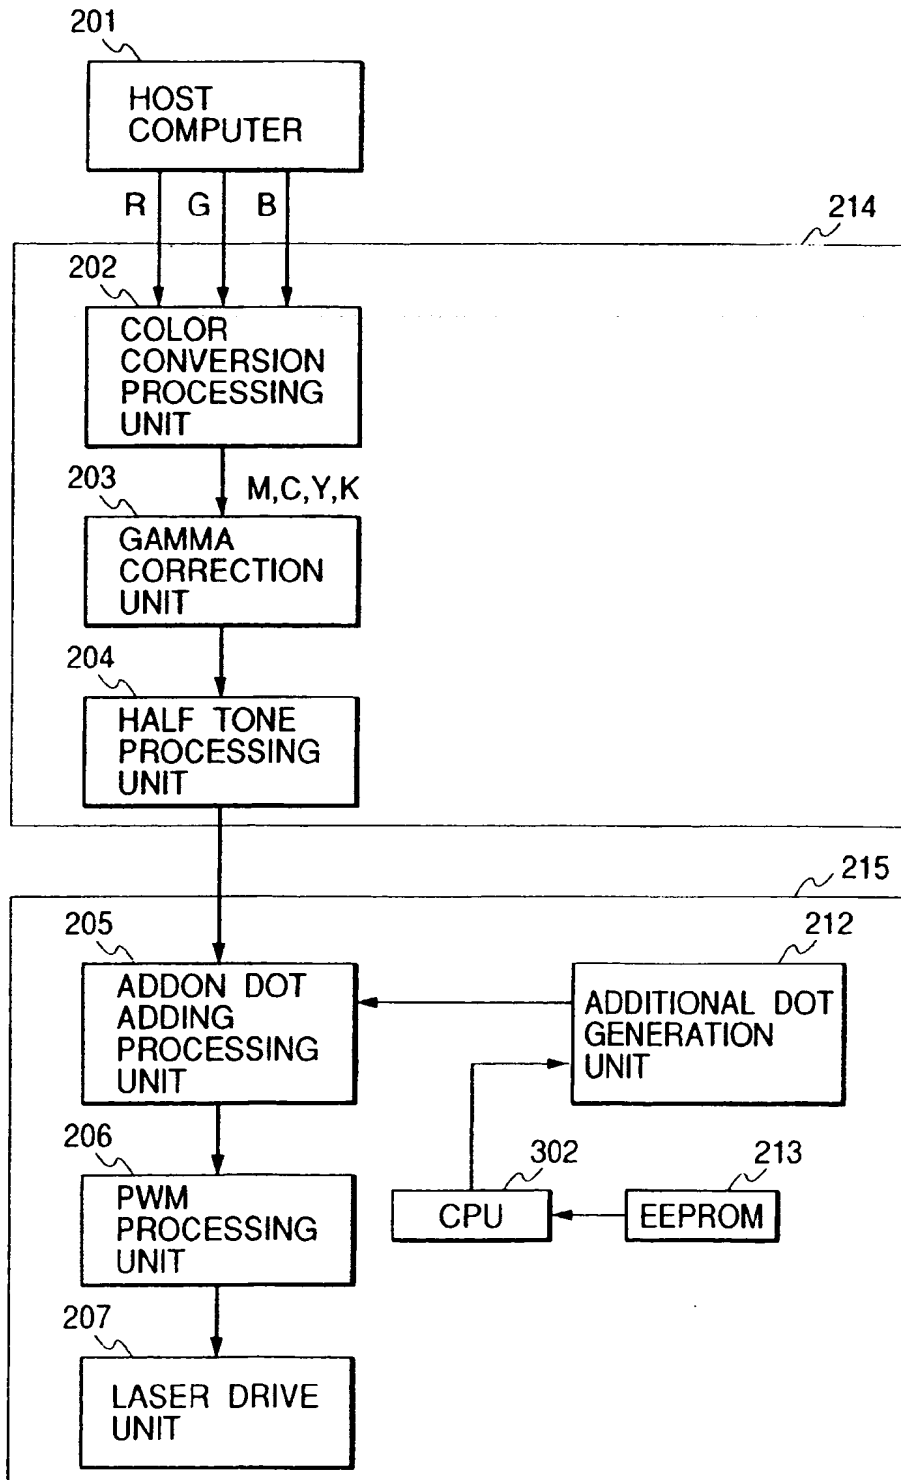


FIG. 5

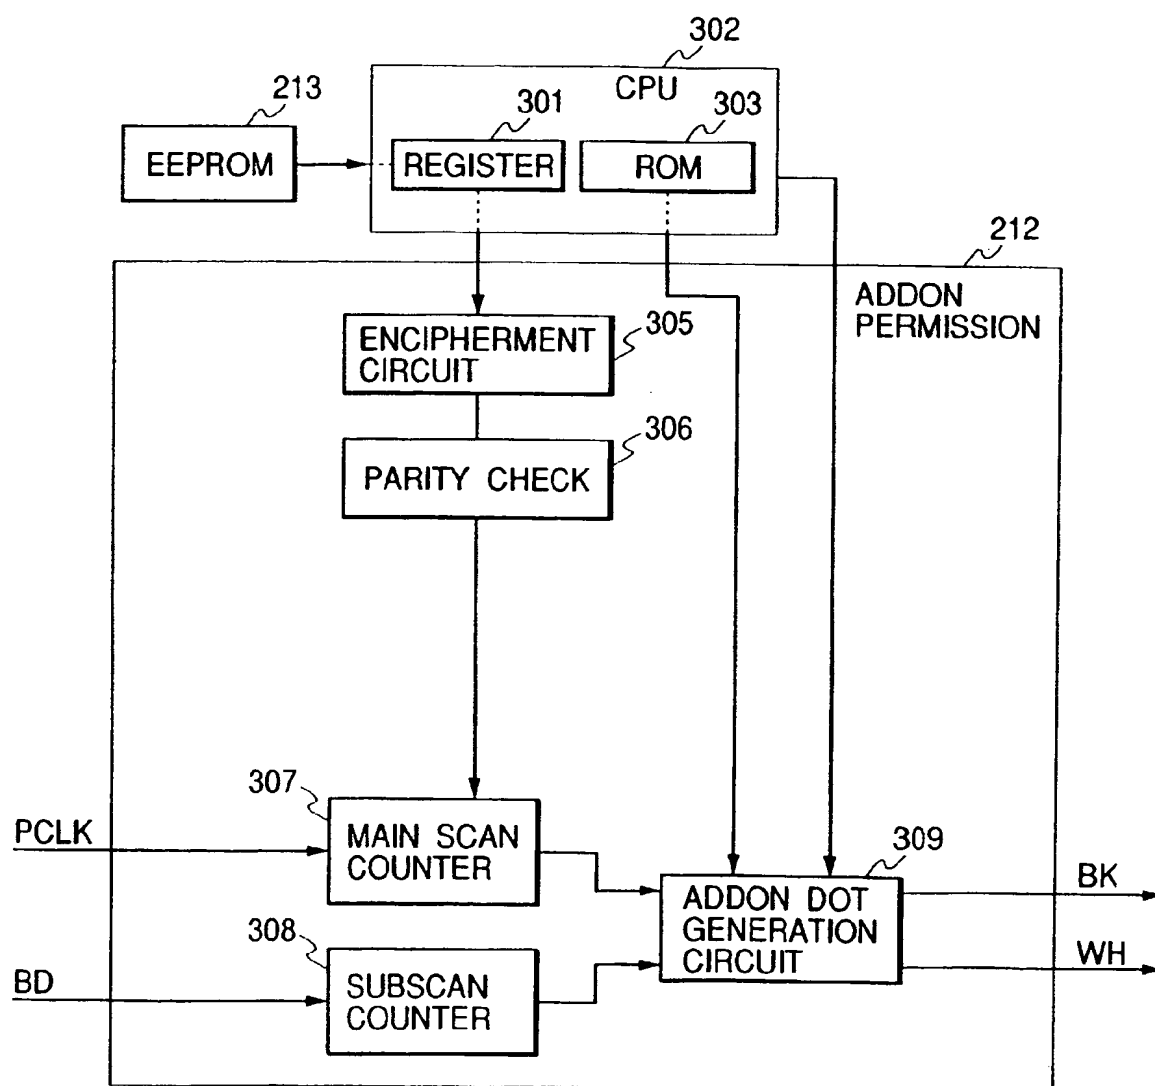


FIG. 6

	b7	b6	b5	b4	b3	b2	b1	b0
F000	TRACKING PATTERN DATA 0							
F001	TRACKING PATTERN DATA 1							
F002	TRACKING PATTERN DATA 2							
F003	TRACKING PATTERN DATA 3							
F004	TRACKING PATTERN DATA 4							
F005	TRACKING PATTERN DATA 5							


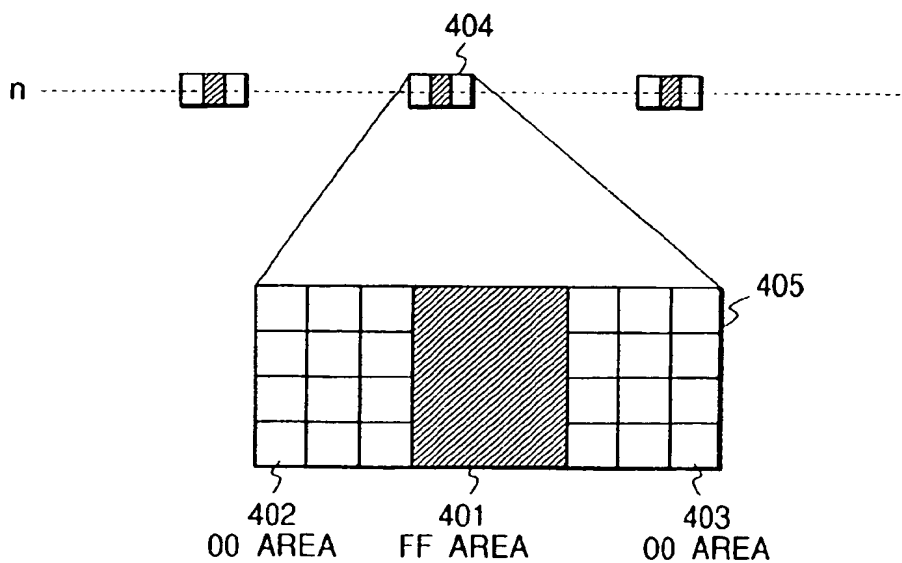
FIG. 7

FIG. 8

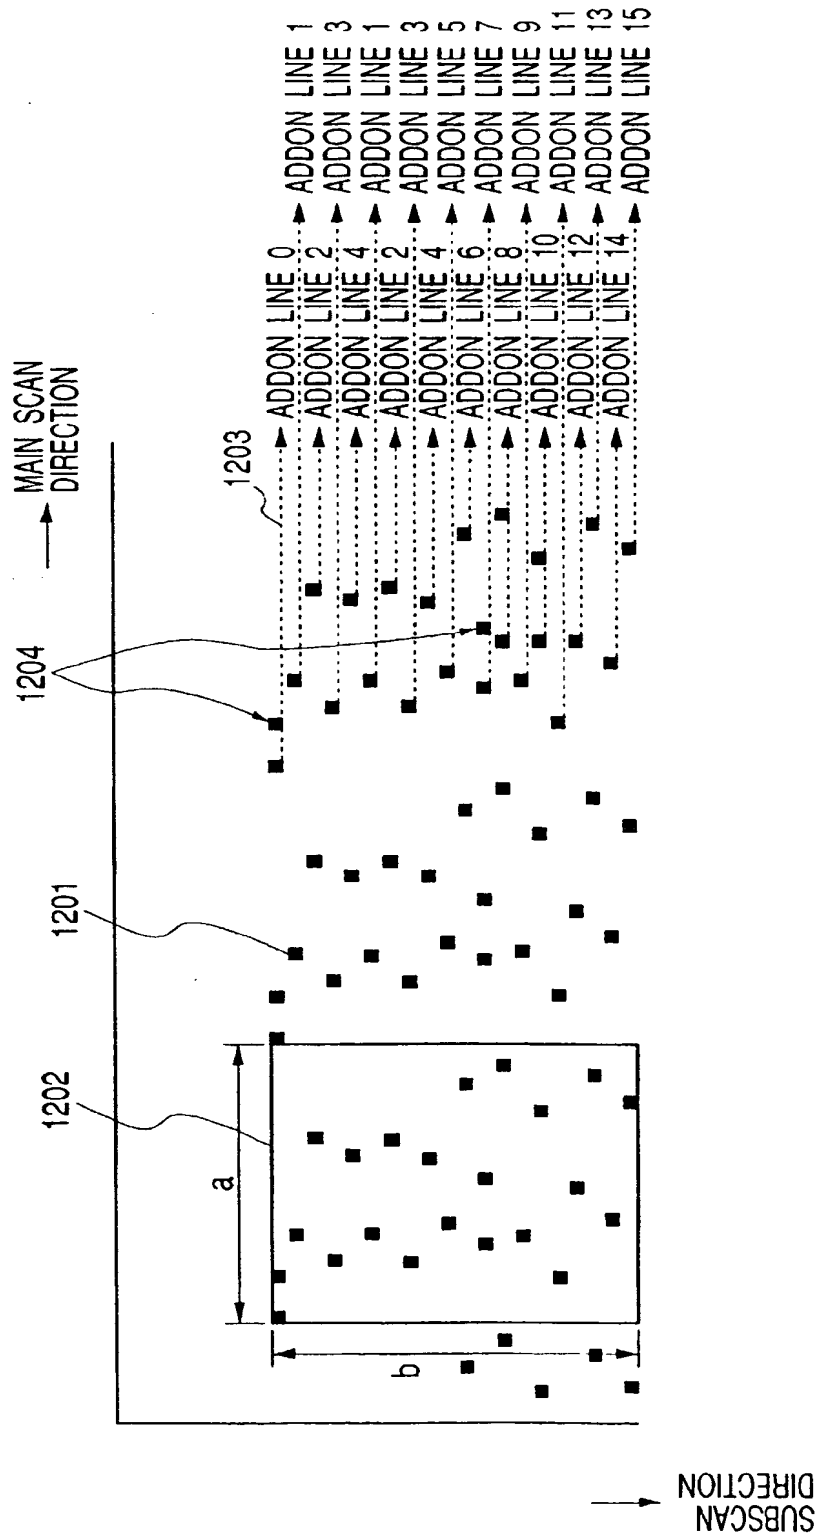

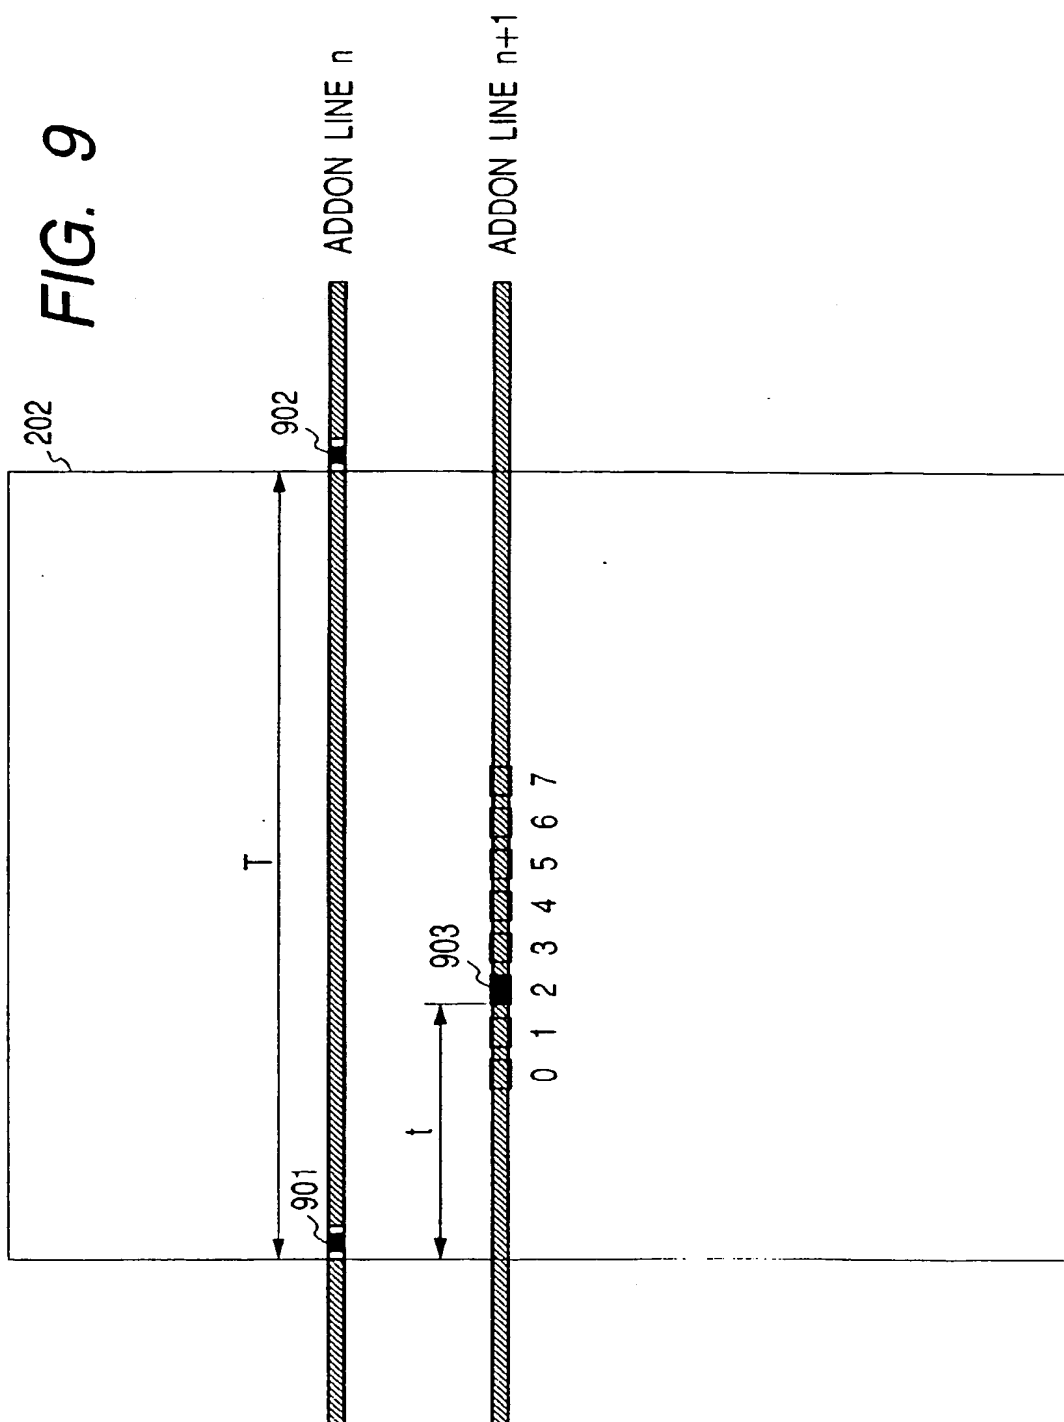


FIG. 10

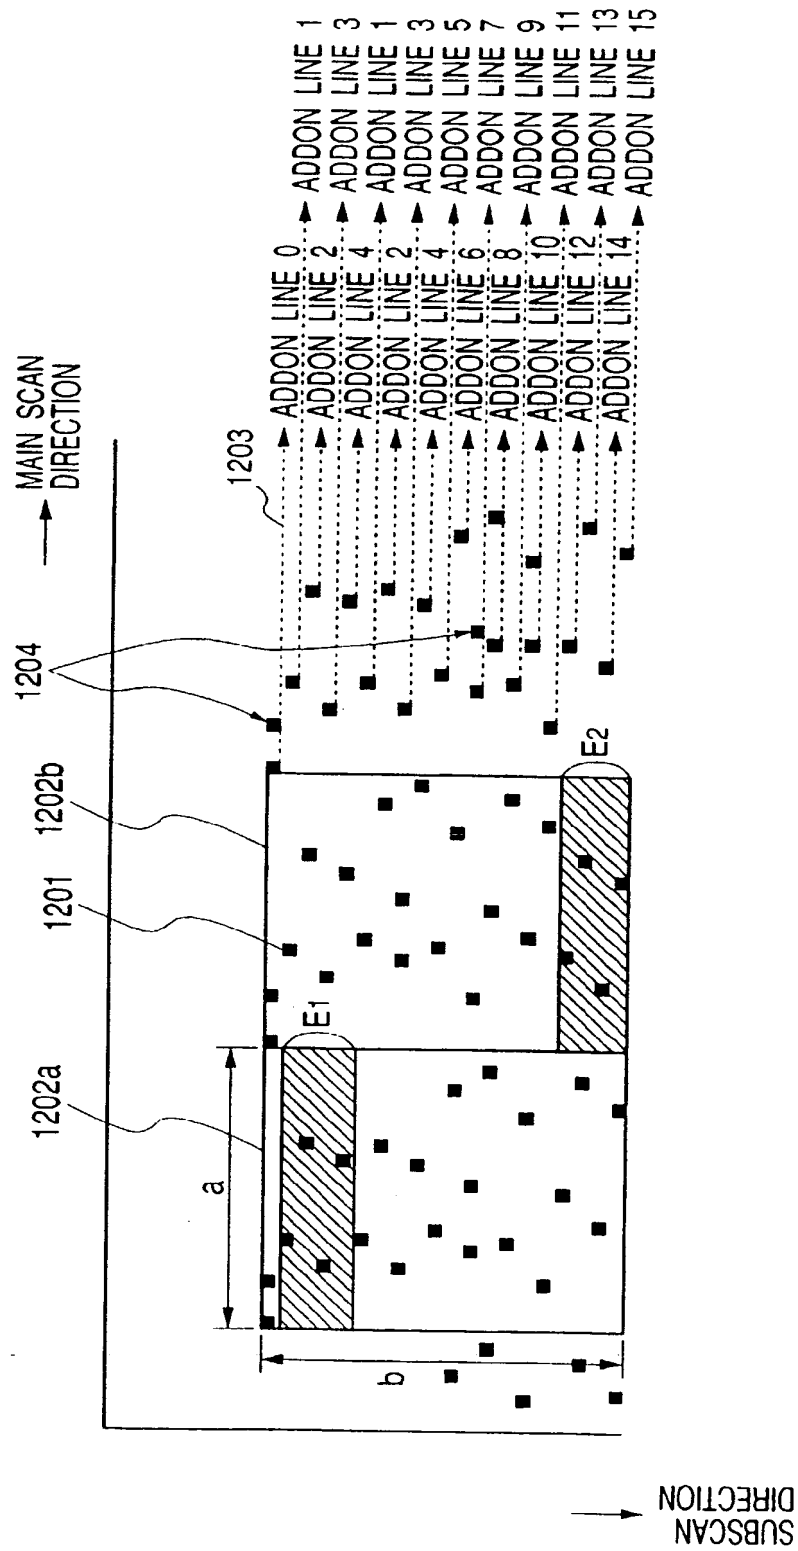


FIG. 11

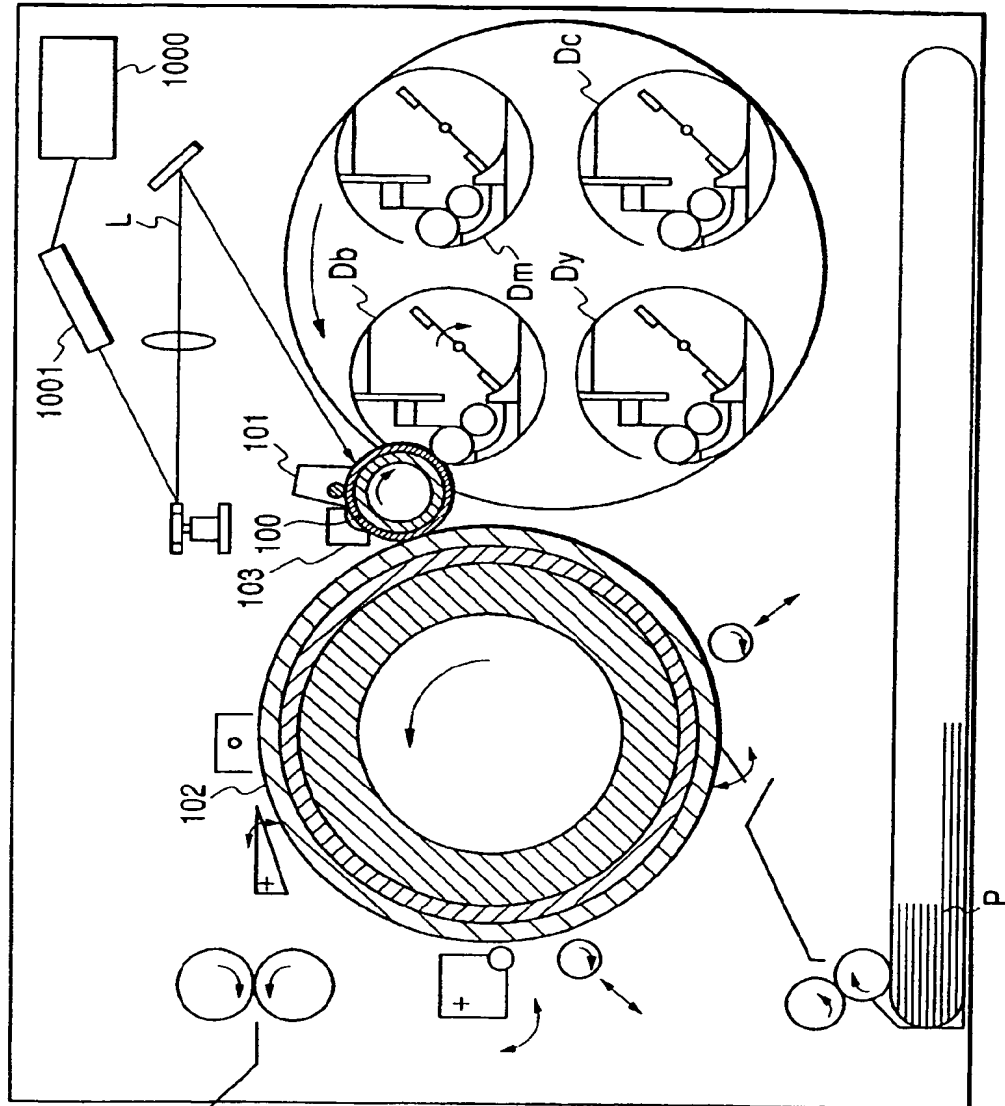


FIG. 12

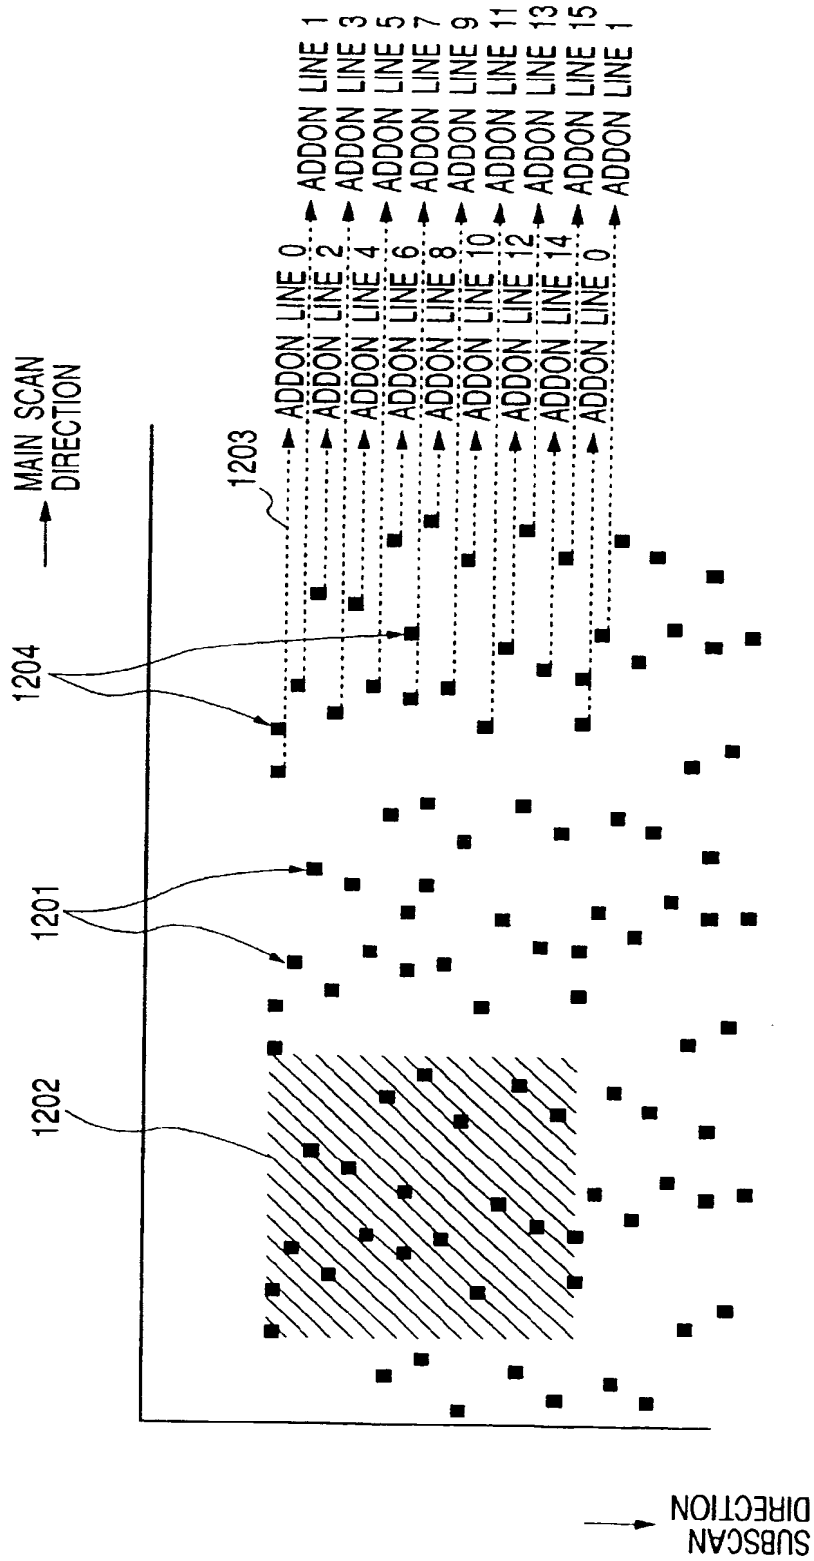


FIG. 13

	b7	b6	b5	b4	b3	b2	b1	b0
F000	TRACKING PATTERN DATA 0							
F001	TRACKING PATTERN DATA 1							
F002	TRACKING PATTERN DATA 2							
F003	TRACKING PATTERN DATA 3							
F004	TRACKING PATTERN DATA 4							
F005	TRACKING PATTERN DATA 5							
F006	TRACKING PATTERN DATA 6							
F007	TRACKING PATTERN DATA 7							
F008	TRACKING PATTERN DATA 8							
F009	TRACKING PATTERN DATA 9							
F00A	TRACKING PATTERN DATA A							

FIG. 14

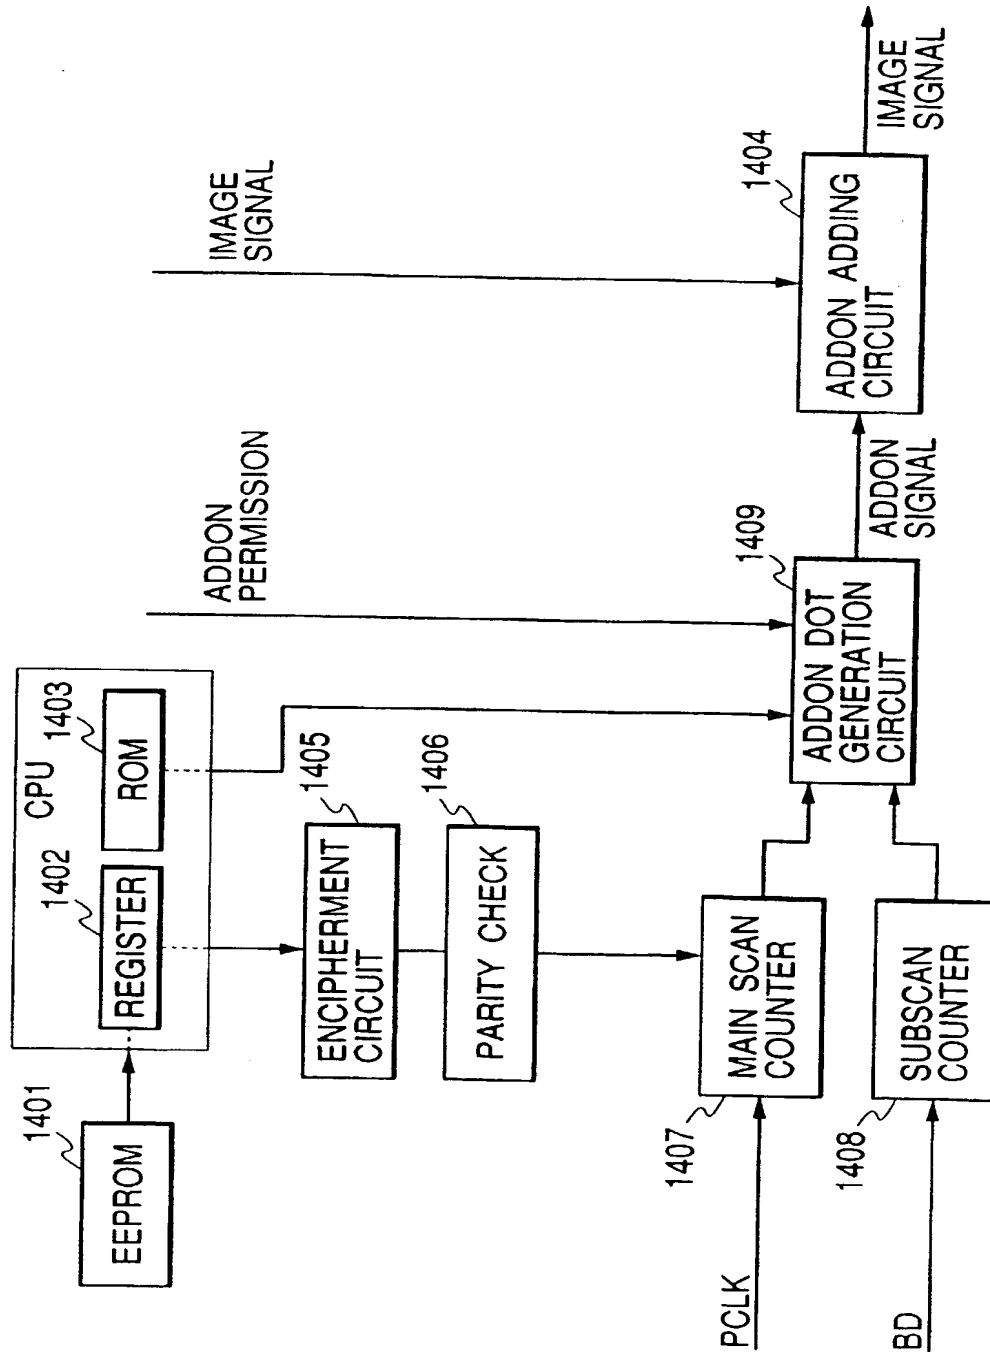


FIG. 15

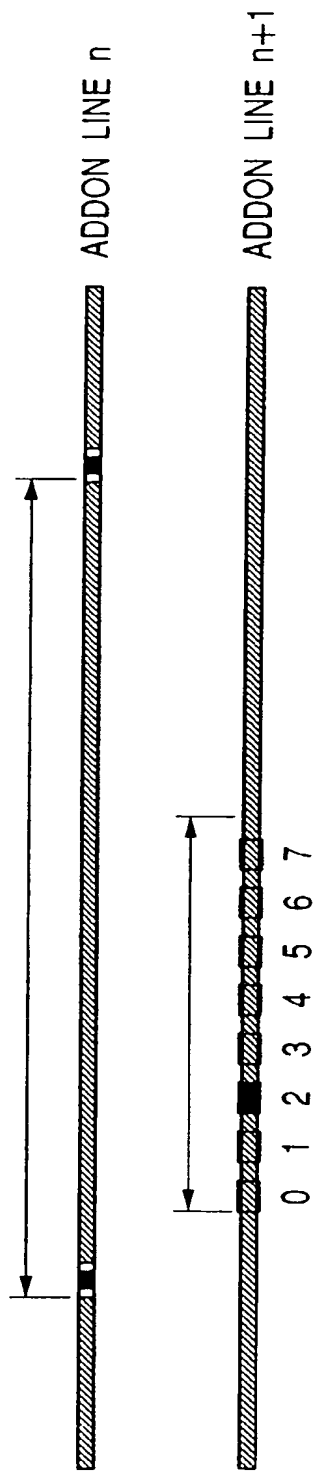


FIG. 16

	CODE	BINARIZED CODE	
PHASE DIFFERENCE BETWEEN ADDON LINE 15 AND ADDON LINE 0	2	0,1,0	→ (a02,a01,a00)
PHASE DIFFERENCE BETWEEN ADDON LINE 0 AND ADDON LINE 1	4	1,0,0	→ (a12,a11,a10)
PHASE DIFFERENCE BETWEEN ADDON LINE 1 AND ADDON LINE 2	0	0,0,0	→ (a22,a21,a20)
PHASE DIFFERENCE BETWEEN ADDON LINE 2 AND ADDON LINE 3	0	0,0,0	→ (a32,a31,a30)
PHASE DIFFERENCE BETWEEN ADDON LINE 3 AND ADDON LINE 4	2	0,1,0	→ (b02,b01,b00)
PHASE DIFFERENCE BETWEEN ADDON LINE 4 AND ADDON LINE 5	4	1,0,0	→ (b12,b11,b10)
PHASE DIFFERENCE BETWEEN ADDON LINE 5 AND ADDON LINE 6	4	1,0,0	→ (b22,b21,b20)
PHASE DIFFERENCE BETWEEN ADDON LINE 6 AND ADDON LINE 7	0	0,0,0	→ (b32,b31,b30)
PHASE DIFFERENCE BETWEEN ADDON LINE 7 AND ADDON LINE 8	0	0,0,0	→ (b42,b41,b40)
PHASE DIFFERENCE BETWEEN ADDON LINE 8 AND ADDON LINE 9	0	0,0,0	→ (b52,b51,b50)
PHASE DIFFERENCE BETWEEN ADDON LINE 9 AND ADDON LINE 10	0	0,0,0	→ (b62,b61,b60)
PHASE DIFFERENCE BETWEEN ADDON LINE 10 AND ADDON LINE 11	0	0,0,0	→ (b72,b71,b70)
PHASE DIFFERENCE BETWEEN ADDON LINE 11 AND ADDON LINE 12	4	1,0,0	→ (b82,b81,b80)
PHASE DIFFERENCE BETWEEN ADDON LINE 12 AND ADDON LINE 13	4	1,0,0	→ (b92,b91,b90)
PHASE DIFFERENCE BETWEEN ADDON LINE 13 AND ADDON LINE 14	1	0,0,1	→ (b102,b101,b100)
PHASE DIFFERENCE BETWEEN ADDON LINE 14 AND ADDON LINE 15	0	0,0,0	→ (b112,b111,b110)

FIG. 17

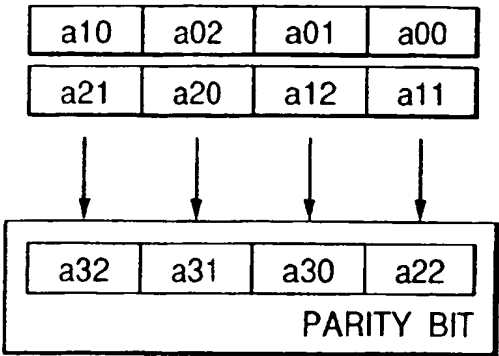


FIG. 19


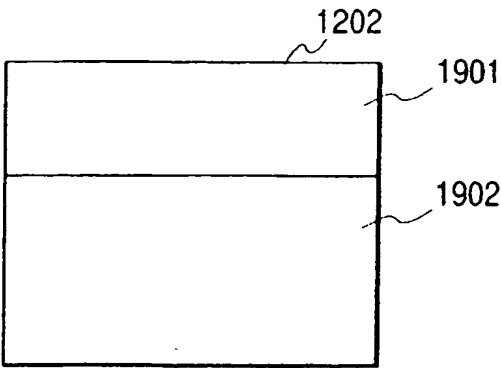


FIG. 18

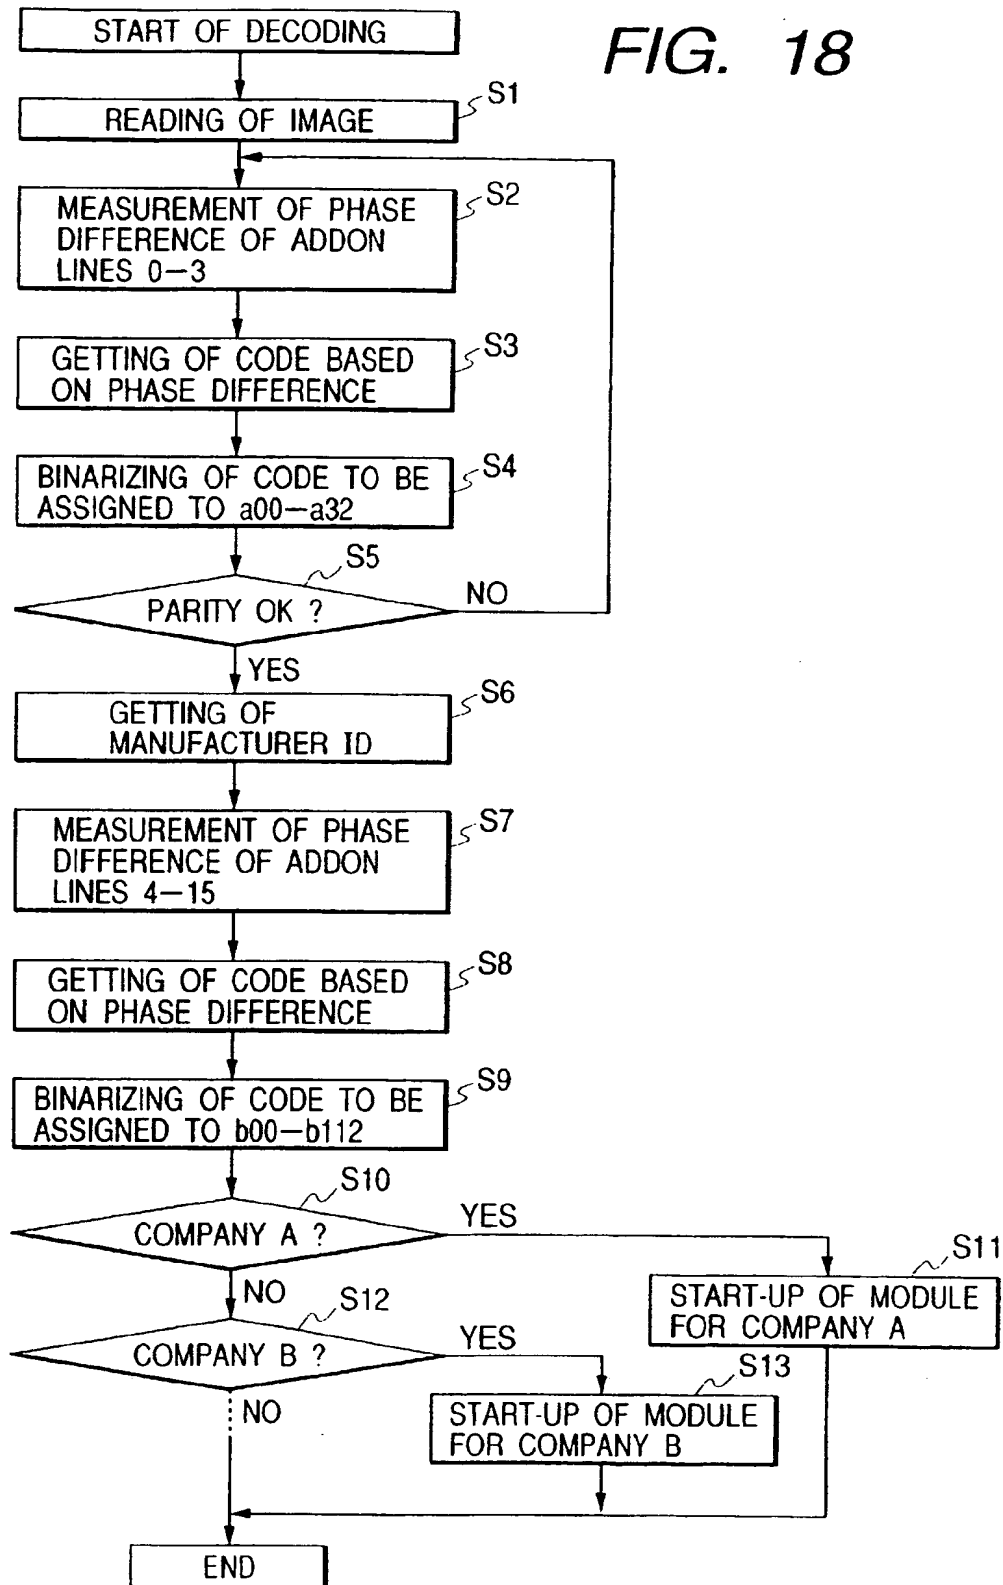

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
12.04.2000 Bulletin 2000/15

(51) Int Cl.7: **H04N 1/00, H04N 1/32**

(43) Date of publication A2:
20.01.1999 Bulletin 1999/03

(21) Application number: **98305626.8**

(22) Date of filing: **14.07.1998**

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
 • **Sakaki, Eihiro**
Ohta-ku, Tokyo (JP)
 • **Yamazaki, Hiroyuki**
Ohta-ku, Tokyo (JP)

(30) Priority: **15.07.1997 JP 18974397**
15.07.1997 JP 18974497

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
High Holborn
2-5 Warwick Court
London WC1R 5DJ (GB)


(71) Applicant: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(54) **Image processing apparatus and method and storage medium**

(57) It is an object to provide an adding technique for enabling additional information to be certainly decoded from an image to which two or more kinds of additional information was added to an input image so that it is difficult to discriminate by the human eyes. To accomplish this object, for example, a plurality of kinds of additional information is periodically added to the input image at different periods so that it is difficult to discriminate by the human eyes. The image to which those additional information was added is outputted to an image forming unit.

comply this object, for example, a plurality of kinds of additional information is periodically added to the input image at different periods so that it is difficult to discriminate by the human eyes. The image to which those additional information was added is outputted to an image forming unit.

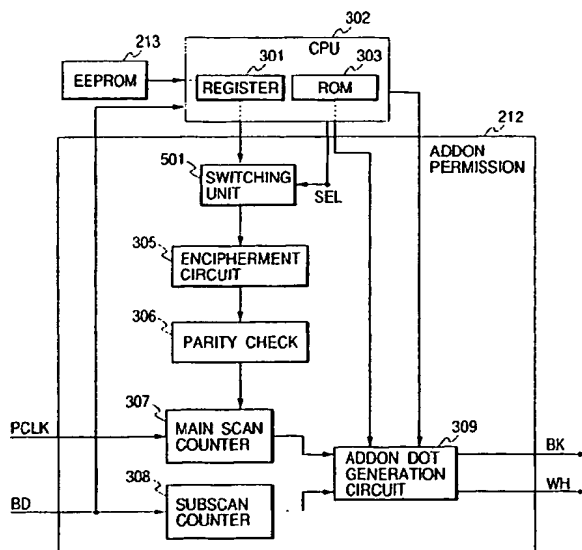FIG. 1





European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 5626

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 493 053 A (XEROX CORP) 1 July 1992 (1992-07-01) * abstract *	1,2,27, 29,33	H04N1/00 H04N1/32
A	EP 0 581 317 A (INTERACTIVE HOME SYSTEMS) 2 February 1994 (1994-02-02) * abstract *	1-3,14, 29-31, 33-35	
A	US 5 568 550 A (UR SHMUEL) 22 October 1996 (1996-10-22) * abstract *	1-3,14, 29-31, 33-35	
A	EP 0 651 554 A (EASTMAN KODAK CO) 3 May 1995 (1995-05-03) * abstract *	3,14,30, 31,34,35	
A	BENDER W ET AL: "TECHNIQUES FOR DATA HIDING" IBM SYSTEMS JOURNAL,US,IBM CORP. ARMONK, NEW YORK, vol. 35, no. 3/04, 1 January 1996 (1996-01-01), pages 313-335, XP000635079 ISSN: 0018-8670 * page 335, left-hand column, line 12 - line 20 *	14,31,35	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04N
A	SANDFORD M T ET AL: "THE DATA EMBEDDING METHOD" PROCEEDINGS OF THE SPIE,US,SPIE, BELLINGHAM, VA, vol. 2615, 23 October 1995 (1995-10-23), pages 226-259, XP000601271 * page 240 * * Section 5.3 *	15,32,36	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 February 2000	Examiner Hazel, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1600 03-92 (PUB.01)



European Patent
Office

Application Number

EP 98 30 5626

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 5626

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CL6)
A	EP 0 593 260 A (SONY CORP) 20 April 1994 (1994-04-20) * abstract *	15,32,36	
			TECHNICAL FIELDS SEARCHED (Int.CL6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 February 2000	Examiner Hazel, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1508 03.02 (P04001)



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 98 30 5626

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1,2,29,33

Addition of two sets of additional information to reproduced image data with different periods

2. Claims: 3-13,30,34

Switching positional relation between area showing first additional information and area showing second additional information

3. Claims: 14,16-28,31,35

Addition of first additional information by a first method and addition of second additional information by a second method, the first additional information being able to specify the second method

4. Claims: 15,32,36

Addition of first additional information including an error correction code having a first error correction ability and second additional information including an error correction code having a second, different error correction ability

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 5626

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-02-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0493053 A	01-07-1992	US 5315098 A	24-05-1994
		DE 69119882 D	04-07-1996
		DE 69119882 T	28-11-1996
		JP 2060237 C	10-06-1996
		JP 4334266 A	20-11-1992
		JP 7097822 B	18-10-1995
EP 0581317 A	02-02-1994	US 5721788 A	24-02-1998
		CA 2101673 A	01-02-1994
		JP 6343128 A	13-12-1994
		US 5930377 A	27-07-1999
		US 5809160 A	15-09-1998
US 5568550 A	22-10-1996	NONE	
EP 0651554 A	03-05-1995	JP 7212712 A	11-08-1995
EP 0593260 A	20-04-1994	JP 6125533 A	06-05-1994
		DE 69324990 D	24-06-1999
		DE 69324990 T	11-11-1999
		EP 0880284 A	25-11-1998
		US 5528606 A	18-06-1996

EPO FORM P4429

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)